Larvik® Slim

FLOOD LIGHTING — 10 - 280W

Wide range of luminaires truly built for outdoors. Smart optics minimize the number needed.

ARCHITECTURAL LIGHTING · TOTEMS · ADVERTISING PANELS · BILLBOARD

5 YEARS
50.000hrs
L50

- Meet your needs from 1.000 to 31.000 lm
- Different optics and colors available
- Ultra light-weight and compact IP67
- Specially treated for rough outdoor conditions

LEDIT YAKI - Le Lighthouse
3 allée des Vignes
91160 Champlan – France
www.yaki.com
info@yaki.com

LEDIT YAKI
Rm 2107-2108, Guangzhou Exchange Square
No.268 DongFengZhong Rd
Guangzhou, Guangdong, 510030 CHINA
www.ledit-yaki.com
sales@leditinternational.com

LEDIT YAKI

Larvik® Slim
FLOOD LIGHTING — 100 W

5 YEARS
50.000hrs
L50

IP67 | IK07 | 90-295 V/AC | -35°/+45°C

TECHNICAL DATA

Code	Designation	Color Temperature / Wavelength			LED power (W)	System power (W)	Lumen output (lm)	Efficiency (lm/W)	CRI	Beam Angle (°)	Net Weight (Kg/ lb)
21120012	LARVIK SLIM 100W 12x12 deg 5000K IP67 (AC 90-295V)	◯	NW	5000K	100	113	11865	105	>70	12x12	4,6 / 10
21120044	LARVIK SLIM 100W 30x30 deg 5000K IP67 (AC 90-295V)	◯	NW	5000K	93	100	11500	115	>70	30x30	4,6 / 10
21120013	LARVIK SLIM 100W 60x60 deg 5000K IP67 (AC 90-295V)	◯	NW	5000K	93	100	11500	115	>70	60x60	4,6 / 10
21120045	LARVIK SLIM 100W 60x135 deg 5000K IP67 (AC 90-295V)	◯	NW	5000K	100	113	11865	105	>70	60x135	4,6 / 10
21120014	LARVIK SLIM 100W 85x135 deg 5000K IP67 (AC 90-295V)	◯	NW	5000K	93	100	11500	115	>70	85x135	4,6 / 10
21120122	LARVIK SLIM 100W BB lens 5000K IP67 (AC 90-295V)	◯	NW	5000K	100	113	10735	95	>70	BB lens	4,6 / 10
21120046	LARVIK SLIM 100W 12x12 deg 3000K IP67 (AC 90-295V)	◯	WW	3000K	100	113	10735	95	>70	12x12	4,6 / 10
21120047	LARVIK SLIM 100W 30x30 deg 3000K IP67 (AC 90-295V)	◯	WW	3000K	93	100	10580	105	>70	30x30	4,6 / 10
21120048	LARVIK SLIM 100W 60x60 deg 3000K IP67 (AC 90-295V)	◯	WW	3000K	93	100	10580	105	>70	60x60	4,6 / 10
21120049	LARVIK SLIM 100W 60x135 deg 3000K IP67 (AC 90-295V)	◯	WW	3000K	100	113	10735	95	>70	60x135	4,6 / 10
21120050	LARVIK SLIM 100W 85x135 deg 3000K IP67 (AC 90-295V)	◯	WW	3000K	93	100	10580	105	>70	85x135	4,6 / 10

DIMENSIONS

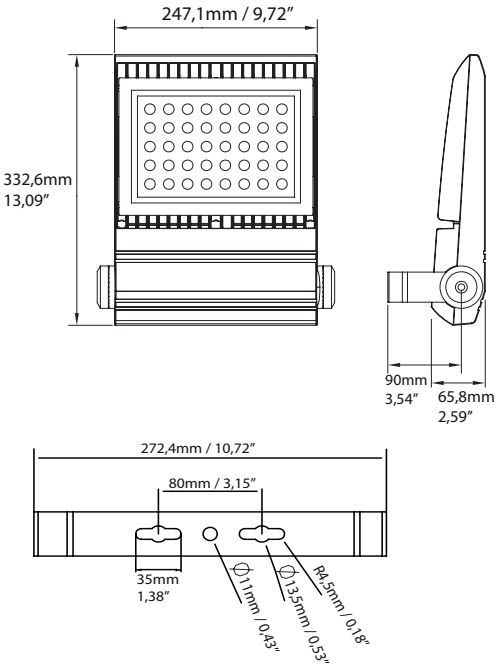

LIGHT DISTRIBUTION

LARVIK SLIM 100W 12x12°



LARVIK SLIM 100W 30x30°



LARVIK SLIM 100W 60x60°



LARVIK SLIM 100W 60x135°



LARVIK SLIM 100W 85x135°



LARVIK SLIM 100W BB LENS°



ACCESSORIES

Code	Designation	Max imum weight supported
21760080	LARVIK SLIM BRACKET 500mm with MATTE Black color,vertical version	1,2 kg / 2,65 lb
21760081	LARVIK SLIM BRACKET 1000mm with MATTE Black color,vertical version	1,7 kg / 3,75 lb

21760080

21760081

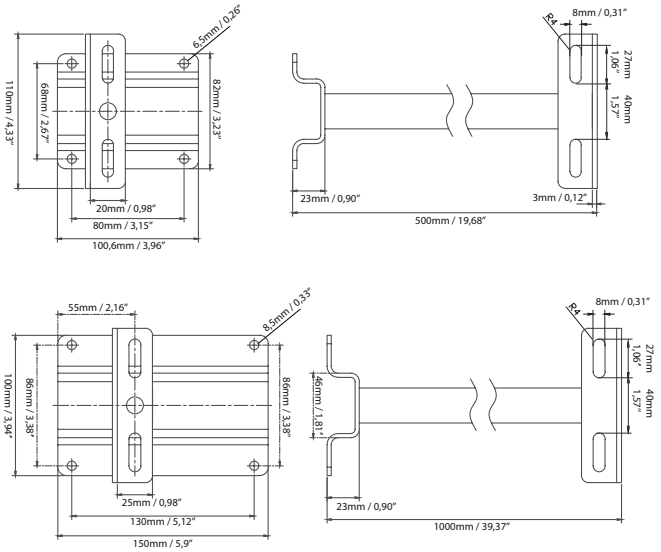

NORMS & CERTIFICATES

- EN 55015:2018
- EN 61547:2019
- EN 61000-3-2:2019
- EN 61000-3-3:2013+A1:2019
- EN 60598-2-5:2015
- EN 60598-1:2015+A1: 2018
- EN 62471:2008

CE RoHS 2002/95/EC

PACKAGING

Types	SIZE - LxWxH (cm)	SIZE - LxWxH (ft)	Weight (kg)	Weight (lb)	Units (set)
LARVIK SLIM 10W	39 x 36,8 x 23	1,3 x 1,2 x 0,8	10,4	22,9	10
LARVIK SLIM 30W	40,5 x 31,3 x 47,2	1,3 x 1 x 1,6	19	41,9	10
LARVIK SLIM 50W	55 x 39,9 x 43,6	1,8 x 1,3 x 1,4	29,3	64,6	8
LARVIK SLIM 80 & 100W	54,8 x 33 x 43,2	1,8 x 1 x 1,4	20	44	4
LARVIK SLIM 140W	52 x 38,7 x 16,5	1,7 x 1,3 x 0,5	9	19,8	1
LARVIK SLIM 210W	52 x 53,9 x 16,5	1,7 x 1,8 x 0,5	13,9	30,6	1
LARVIK SLIM 280W	52 x 69,1 x 16,5	1,7 x 2,3 x 0,5	17	37,5	1



(When the min and max values are not indicated, the tolerance range for optical and electrical data is ±15 %.)